

10/27/99

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 12/97

Approved for use through 09/30/00. OMB 0651-0032  
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

**UTILITY  
PATENT APPLICATION  
TRANSMITTAL**

Attorney Docket No.

P98-1866

Total Pages

26

First Named Inventor or Application Identifier

SELIGMAN, A.

Express Mail Label No.

EJ031160909US

(Only for new nonprovisional applications under 37 CFR 1.53(b))

**APPLICATION ELEMENTS**

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

1. ☒ **Fee Transmittal Form**  
(Submit an original, and a duplicate for fee processing)
2. ☒ **Specification** [Total Pages **15**]  
(preferred arrangement set forth below)
- Descriptive title of the Invention
  - Cross References to Related Applications
  - Statement Regarding Fed sponsored R & D
  - Reference to Microfiche Appendix
  - Background of the Invention
  - Brief Summary of the Invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - Claim(s)
  - Abstract of the Disclosure
3. ☒ **Drawings(s) (35 USC 113)** [Total Sheets **4**]
4. ☒ **Oath or Declaration** [Total Pages **2**]
- a. ☒ Newly executed (original or copy)
- b. ☐ Copy from a prior application (37 CFR 1.63(d))  
(for continuation/divisional with Box 17 completed)  
[Note Box 5 below]
- i. ☐ **DELETION OF INVENTOR(S)**  
Signed statement attached deleting inventor(s)  
named in the prior application, see 37 CFR  
1.63(d)(2) and 1.33(b).
5. ☐ **Incorporation by Reference (useable if Box 4b is checked)**  
The entire disclosure of the prior application, from  
which a copy of the oath or declaration is supplied  
under Box 4b, is considered as being part of the  
disclosure of the accompanying application and is  
hereby incorporated by reference therein.

6. ☐ **Microfiche Computer Program (Appendix)**
7. ☐ **Nucleotide and/or Amino Acid Sequence Submission**  
(if applicable, all necessary)
- a. ☐ **Computer Readable Copy**
- b. ☐ **Paper Copy (identical to computer copy)**
- c. ☐ **Statement verifying identity of above copies**

**ACCOMPANY APPLICATION PARTS**

8. ☒ **Assignment Papers (cover sheet & documents)**
9. ☐ **37 CFR 3.73(b) Statement** ☒ **Power of Attorney**  
(when there is an assignee)
10. ☐ **English Translation Document (if applicable)**
11. ☐ **Information Disclosure** ☐ **Copies of IDS**  
Statement (IDS)/PTO-1449 Citations
12. ☐ **Preliminary Amendment**
13. ☒ **Return Receipt Postcard (MPEP 503)**  
(Should be specifically itemized)
14. ☐ **Small Entity** ☐ **Statement filed in prior application,**  
Statement(s) Status still proper and desired
15. ☐ **Certified Copy of Priority Documents(s)**  
(if foreign priority is claimed)
- ☐ **Other:-----**

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application no:**18. CORRESPONDENCE ADDRESS**☐ **Customer Number or Bar Code Label**

(Insert Customer No. or Attach bar code label here.)

☐ **Correspondence address below**

NAME	JAMES T. COMFORT Reg. No. 19,086				
	SHARP, COMFORT & MERRETT, P.C.				
ADDRESS	13455 NOEL ROAD				
	SUITE 1710				
CITY	DALLAS	STATE	TEXAS	ZIP CODE	75240
COUNTRY	U.S.A.	TELEPHONE	(972)490-3695	FAX	(972)490-3863

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Office, patent and Trademark office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington DC 20231.

# SPECIFICATION

TO ALL WHOM IT MAY CONCERN:

BE IT KNOWN THAT I, Adam Seligman, have invented new and useful improvements in a

## METHOD AND APPARATUS FOR DISPLAYING DISTRIBUTED MULTIREOLUTION SCENES

of which the following is a specification:

<b><u>Certificate under 37 C.F.R. 1.10 of Mailing by "Express Mail"</u></b>	
Label Number: _____	
I hereby certify that this correspondence is being deposited with the U.S. Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.	
<u>Judy A. Betts</u>	<u>10-27-99</u>
Signature of person mailing correspondence	Date
<u>JUDY A. BETTS</u>	
Typed or printed name of person mailing correspondence	

Patent Application  
Inventor: Seligman

## **BACKGROUND OF THE INVENTION**

### **1. Technical Field:**

The present invention relates generally to the storage and display of computer graphics. Specifically, the present invention manipulates and displays large sets of three-dimensional data using several discrete computer systems which operate together.

### **2. Description of the Related Art:**

Computers are often used for the manipulation and display of graphical data, and computer users expect increasing levels of sophistication and realism in these systems. Interactive graphics have often been limited to two dimensional (2D) images and animated sequences, because the storage and computational requirements may be met with a typical computer system. Now, however, interaction with three dimensional (3D) scenes is utilized in many applications. These 3D scenes are often more difficult to manage than 2D graphics because of the storage and computational requirements necessary to properly view a 3D scene. Factors such as geometry and lighting calculations, applications of textures and other surface features must all be analyzed to accurately depict the 3D scene. Both the computation and storage of these elements are demanding of computer systems. However, due to advances in computer technology, modest amounts of 3D data can be rendered into images and displayed using generally available personal computers. But, very high-quality 3D scenes can require the storage and manipulation of more 3D data than a single personal computer can efficiently handle. Thus, the development of computer systems which can manipulate and display ever larger amounts of 3D data for generating high-quality graphic images is ongoing.

One solution has been to improve the hardware and software that converts 3D scene data into a sequence of images for display. However, the "3D rendering algorithms" used to accomplish this task are relatively advanced and only modest improvements have occurred in the past few years. The integrated circuits used for rendering have made significant advances, along with the progress of integrated circuits in general, but each new generation yields only incremental performance increases.

Another approach to improve the performance of 3D rendering algorithms relates to displaying only a portion of the 3D data at one time. By omitting large parts of data from the rendering process, the algorithm may execute more quickly. However, systems which rely solely on this method often are forced to omit relevant parts of the 3D scene. In essence, a "close up" view of one portion of the 3D scene is all that can be displayed. This characteristic is often unacceptable for users.

Multiresolution modeling represents yet another approach for efficiently manipulating and displaying 3D data sets. Multiresolution modeling techniques operate on the principle that some elements that make up a 3D scene are of less importance than others. For example, items in the background of a 3D scene might be represented in less detail than items in the foreground. These techniques correspond to the way people view the world around them. People perceive objects located far away as being generally smaller and containing less detail as compared to nearby objects. Computer systems employing multiresolution modeling techniques generally take advantage of this characteristic of human perception by illustrating objects located in the background of a 3D scene with less detail than those located in the foreground.

For example, a high-resolution image of a house could contain data which represents the contours of each brick, the leaves of shrubs in front of the house, the individual shingles on the roof, and so on. In a 3D scene, if the house is located in the immediate foreground, all of the data representing the details described above may have to be recalled from some storage device (e.g., a hard disk or CD-ROM), transmitted to the graphics processor, and then rendered. On the other hand, if the house were in the far background, the bricks could be represented as simple rectangles of a single color, without any contours, and the shrubs and roof could be similarly simplified. The amount of data required to represent a low-resolution 3D model of the house is much less than is required to represent the high-resolution 3D model. Processing lower resolution 3D data results in faster rendering of the data into images, as the smaller data set size allows for a lightened computational load for the computer system.

Multiresolution modeling appears to be an efficient method for lessening the data sizes used to render, however, it does have its drawbacks. These drawbacks tend to adversely impact either disk storage space or processing resources. Figure 1 illustrates an example of how implementing multiresolution modeling on a computer system can consume large amounts of the computer's data storage (e.g., disk space or RAM). As shown in Figure 1, several versions of 3D data representing the house discussed above are stored at varying levels of detail (LOD). The model designated as LOD[0] contains all of the details of the house, while model LOD[8] is a highly simplified model, with few detail. Models LOD[1] through LOD[7] contain intermediate levels of detail. When the 3D model of the house is required for the rendering of an image, workstation 120 determines the appropriate detail needed for the rendered house to have good visual qualities, then recalls the data representing the house at the appropriate LOD from storage 110. Next, workstation 120 uses this LOD model of the house in its graphics subsystem, which renders it to display 130. The problem with this method is that multiple data sets representing the same house at varying LOD have to be stored in storage 110. These redundant models consume more storage space than a single model and therefore represent an inefficient aspect of

this implementation of the multiresolution modeling technique. The storage penalty is particularly large if many LOD versions are stored for higher visual quality.

Some more sophisticated multiresolution imaging techniques use what are known as progressive techniques. Progressive techniques allow a single high-resolution 3D data set to be transformed into other data sets with an almost unlimited LOD. In particular, Hughues Hoppes' Progressive Mesh (PM) represents an advanced multiresolution progressive technique. In 3D graphics, vertices in 3D spaces describe polygons. Polygons are the basic building blocks in traditional 3D graphics. PM techniques generally operate on the collection of vertices that describe the surfaces of objects.

Using PM techniques, a 3D data set representing a complex object is converted into a simplified form made of many fewer vertices and a list (or stream) of "mesh operations" that can extend this data back into the complete 3D data set. The more a computer system utilizes the stream, the more details of the object represented by the 3D data will be available. A short prefix of the stream generates a low LOD version of the object, while a longer prefix of the stream generates a higher LOD version of the object. One benefit of PM techniques is that redundant copies of the model do not have to be stored at varying LOD, as the system can generate an LOD model needed dynamically. However, PM techniques generally require a significant amount of processing resources to convert a model from one LOD to another.

Thus, it would be desirable to create a computer system which uses PM techniques for high visual quality given the constraints of available hardware. However, such a system should not suffer excessive performance penalties associated with constructing lower-resolution data sets from the high-resolution sets, or the benefit of multiresolution modeling is lost.

## **SUMMARY OF THE INVENTION**

This invention is a method of utilizing a collection of computers ("pool") to both store the 3D scene and assist in multiresolution processing. In one embodiment of the present invention, a visualization console acquires a 3D data set representing a 3D scene. The visualization console then transfers the 3D objects within the scene to a pool of other computers. These other computers associate identifiers with the 3D objects and store the 3D data across the pool of machines. Sometime later, the visualization console sends a request to the pool of storage computers for the data needed to render a view of the scene. After receiving the request, the pool of storage computers generates the 3D model with the appropriate LOD for each object, as specified by the request. The pool of storage computers then sends the appropriate LOD representation of the 3D objects to the visualization console for display in the requested scene. The visualization console hence does not need to necessarily perform any multiresolution processing, freeing its computation resources for rendering or other processes.

## **BRIEF DESCRIPTION OF THE DRAWINGS**

The novel features believed characteristic of the invention are set forth in the appended claims. The invention itself, however, as well as a preferred mode of use, further objectives and advantages thereof, will best be understood by reference to the following detailed description of an illustrative embodiment when read in conjunction with the accompanying drawings, wherein:

Figure 1 depicts a prior art computer graphics system;

Figure 2 depicts a computer upon which the present invention can be implemented;

Figure 3 depicts a network of computers upon which the present invention can be implemented; and

Figure 4 is a flowchart illustrating a method of displaying a 3D scene according to the present invention.

## **DETAILED DESCRIPTION OF THE INVENTION**

Figure 2 depicts data processing system 300, which includes processor 302 and display 304. Display 304 includes display screen 306, which may be implemented utilizing a cathode ray tube (CRT), a liquid crystal display (LCD), a thin film transistor (TFT) panel, or the like. Data can be entered into data processing system 300 by means of a mouse 318 or keyboard 316. In addition to mouse 318 and keyboard 316, data can be entered using a track ball, joystick, touch sensitive tablet or screen, trackpad, or glidepad. Mouse 318 may be utilized to move a pointer or cursor on display screen 306. Processor 302 may also be coupled to one or more peripheral devices, such as modem 308 or disk drive 310, each of which may be internal or external to the enclosure of processor 302. Data processing system 300 may also be connected to network 312 in order to communicate with other computer units. Network 312 may be a local intranet (*e.g.*, a LAN or WAN), or the network of computers known as the Internet, or both. An output device such a printer 314 may also be coupled to processor 302.

Those persons skilled in the art of computer system design should recognize that display 304, keyboard 316, and the pointing device 318 may each be implemented utilizing any one of several known off-the-shelf components. Data processing system 300 may be implemented utilizing any general purpose computer or so-called "personal computer," "workstation," or "server," such as those sold by Compaq and others.

Figure 3 illustrates a computer network according to the present invention. Visualization console 404 is connected to workstations 402 by communication links 406. Executing on visualization console 404 is a 3D application program 410. This program provides a user interface and directs the operation of the graphics subsystem on visualization console 404. Also, the 3D application program manages information related to the 3D scenes that can be viewed on visualization console 404. Generally, the information for a given scene is contained in a data structure known as a scene representation 412. In the present invention, these scene representations 412 contain identifiers 414 for each object in a 3D scene, as well as the location of each object in the scene. In prior art implementations, the scene representations contained the 3D geometry and other data that described all the objects in the scene. However, in the present invention, preferably only identifiers 414 and locations for the objects are contained in the scene representation. The bulk of the information representing the objects is stored, at least in part, on workstations 402. The 3D application program uses the identifiers 414 as references to the objects 422 located on workstations 402. In a preferred embodiment of the present invention, the information representing the objects 422 will be stored in database structures on workstations 402, and the identifiers 414 will be used as indexes into these databases.

Operating on each workstation 402 is a scene database program 420. The scene database program 420 stores the 3D and other data representing the objects 422 in a given scene and processes this information upon receiving instructions from visualization console 404. Each workstation 402 can store the 3D data for an entire scene, or the scene can be divided between the various workstations in order to facilitate parallel processing of the scene.

To display an image on visualization console 404, a request is sent to workstations 402. This request contains the identifier 414 of the objects to be displayed. The scene database programs 420 operating on workstations 402 receive the request, then each of workstations 402 begins to construct the objects 422 specified in the requests. This construction process consists, in part, of retrieving the object 422 specified by the identifier 414 contained in the request from a storage medium (*e.g.*, a disk or RAM) accessible by the workstation, and performing some multiresolution and other 3D processing on the object. After workstations 402 have retrieved and processed the specified objects 422, the appropriate LOD models and other data representing the 3D scene are sent to visualization console 404 to be displayed.

In a preferred embodiment of the present invention, workstations 402 are rack mounted Compaq Professional Workstations with 1, 2, or 4, 600Mz processors, greater than 2 GB of RAM and large hard drives. Visualization console 404 is also a Compaq Professional Workstation which has a high performance rendering pipeline on a 3D OpenGL graphics card as its graphics subsystem. Connecting all of these computers is a Tandem ServerNet, which is a system area network (SAN) that communicates data between the various computer systems at the rate of 1 Gbit/s and which has a low communication latency.

Not shown in Figure 3 are the various network components such as network interface cards, bridges, routers, and the like, as the inclusion of these devices is understood by one of ordinary skill in the art. Further, the specific arrangement of computer devices mentioned above is but an exemplary embodiment. Other arrangements of computer devices can implement the invention described herein, and these alternative arrangements are within the scope of this invention.

Figure 4 is a flowchart illustrating a method for using the network of computers described in Figure 3 to display a rendered image from a 3D data set. For the sake of clarity, the following discussion will refer to only a single object 422. However, any number of objects up to the limits of the hardware and software, can be loaded, stored, processed, and displayed using the same method. To initialize a visualization console and workstation system, 3D data representing a 3D scene is acquired by the visualization console (step 502). The objects 422 which comprise the scene are then distributed to the workstations, along with their associated identifiers 414 (step 504). Information concerning the geometry, color, and texture of the object 422 is included with



the other information about each object. The visualization console works with the pool of workstations to distribute the objects 422 evenly among the pool of workstations, so when the 3D objects are processed, each workstation has approximately the same processing load. The purpose of this distribution is to have each workstation working in parallel with the others. A simple method of distribution is to randomly distribute the objects 422 to the workstations. Heuristics can also be used to distribute the objects 422 between the workstations.

When the objects 422 are received by the workstations, they are inserted into a database and associated with the identifier 414 that was received with the object (step 506). The objects 422 will usually be stored to disk, however, they can also be stored in the workstation's RAM. Objects stored in RAM can be retrieved much faster than objects stored to disk due to the respective access times between the two media.

Sometime later, when a user wishes to view a 3D scene that has been loaded into the workstations in the manner described above, the visualization console sends requests to the workstations to render the 3D scene (508). Normally, the request is formed in response to a user's input that specifies which portion of a given 3D scene the user wishes to view. In one embodiment, the visualization console determines which objects in the 3D scene need to be rendered, then directs the requests to the workstations which contain the objects. In an alternative embodiment, the visualization console can broadcast the parameters which describe the 3D scene the user wishes to view to the workstations. The workstations, instead of the visualization console, then determine which of the objects they manage need to be rendered. Information contained in the request include viewing parameters and lighting information.

Once a workstation receives a request from the visualization console, it uses the identifier 414 for the object to retrieve the representation of the object 422 from a database 420 accessible by the workstation. Once the information for an object 422 is retrieved from the database 420, the workstation will use the information transmitted in the request to create a PM with the appropriate LOD (step 510). During this processing, the workstation converts the PM mesh to a mesh with the specified LOD. This conversion includes computing the visibility and complexity of the object. The workstation then sends the specified LOD mesh representation of the object back to a rendering pipeline on visualization console (step 512). The LOD mesh sent to the visualization console by the workstation is a standard mesh of some resolution. In a preferred embodiment, the visualization console is unaware of the PM processing done by the workstations. The visualization console then displays the 3D data representing the objects 422 as it is received from the workstations (step 514).

In summary, the present invention uses several workstations to improve the speed at which large 3D scenes can be rendered. Full resolution models are converted to LOD models in

parallel on the workstations, thereby relieving the visualization console from the storage and computational task associated with the conversion process. Since PM techniques are utilized to simplify the 3D data, the 3D rendering pipeline has to process less data than would otherwise be possible. Operating in this manner allows the 3D rendering pipeline to display images faster while maintaining high visual quality. Also, the use of a high speed network allows the workstations and the visualization console to transfer data very quickly, thereby eliminating most of the performance penalties associated with distributing the processing of the objects.

Aspects of this invention pertain to specific "method functions" implementable on computer systems. In an alternate embodiment, the invention may be implemented as a computer program product for use with a computer system. Those skilled in the art should readily appreciate that programs defining the functions of the present invention can be delivered to a computer in many forms, which include, but are not limited to: (a) information permanently stored on non-writable storage media (e.g. read only memory devices within a computer such as ROMs or CD-ROM disks readable only by a computer I/O attachment); (b) information alterably stored on writable storage media (e.g. floppy disks and hard drives); or (c) information conveyed to a computer through communication media, such as a local area network, a telephone network, or a public network like the Internet. It should be understood, therefore, that such media, when carrying computer readable instructions that direct the method functions of the present invention, represent alternate embodiments of the present invention.

While the invention has been particularly shown and described with reference to a preferred embodiment, it will be understood by those skilled in the art that various changes in form and detail may be made therein without departing from the spirit and scope of the invention.

**WHAT IS CLAIMED:**

1 1. A method for rendering three dimensional scenes, comprising:  
2 sending a request from a first computer to a second computer, wherein the request  
3 identifies a three dimensional object to be rendered;  
4 creating a level of detail (LOD) representation of the three dimensional object on the  
5 second computer; and  
6 returning the LOD representation of the three dimensional object from the second  
7 computer to the first computer, thereby allowing the first computer to display an image of the  
8 three dimensional object.

1 2. The method as recited in claim 1, further comprising:  
2 distributing the three dimensional object from the first computer to the second computer;  
3 and  
4 associating an identifier with the three dimensional object.

1 3. The method as recited in claim 2, further comprising:  
2 inserting the three dimensional object into a database available to the second computer;  
3 and  
4 displaying the LOD representation of the three dimensional object in a three dimensional  
5 scene on the first computer.

1 4. The method as recited in claim 1, wherein the request includes a specified level of detail  
2 for the three dimensional object.

1 5. The method as recited in claim 4, wherein the creating step includes creating a  
2 progressive mesh representation of the three dimensional object with the specified level of detail  
3 as contained in the request.

6. A method for utilizing a network of computers to render a three dimensional scene, comprising:  
sending a plurality of requests from a first computer to a plurality of other computers over a network, wherein the requests identify three dimensional objects to be rendered;  
on each of the plurality of other computers, creating a LOD representation of the three dimensional objects received from the first computer; and  
returning the LOD representations of the three dimensional objects from the plurality of other computers to the first computer, thereby allowing the first computer to display an image of the three dimensional objects.

7. The method as recited in claim 6, further comprising:  
distributing the three dimensional objects from the first computer to the plurality of other computer; and  
associating identifiers with the three dimensional objects.

8. The method as recited in claim 7, further comprising:  
on each of the plurality of other computers, inserting the three dimensional objects into at least one database accessible by each of the plurality of other computers; and  
displaying the LOD representation of the three dimensional objects in a three dimensional scene on the first computer.

9. The method as recited in claim 6, wherein the requests include a specified level of detail for the three dimensional objects.

1 10. The method as recited in claim 9, wherein the creating step includes creating LOD  
2 representations of the three dimensional objects with the specified level of detail as contained in  
3 the requests.

1 11. The method as recited in claim 6, further comprising:  
2 receiving an input from a user on the first computer;  
3 processing the input to determine a first three dimensional scene that corresponds with  
4 the input; and  
5 receiving subsequent inputs from the user and processing the inputs to determine  
6 subsequent three dimensional scenes that correspond with the subsequent inputs, wherein the  
7 user interactively controls the display of the subsequent three dimensional scenes by his  
8 subsequent inputs.

1 12. A computer system for rendering a three dimensional scene, comprising:  
2 a visualization console;  
3 a plurality of workstations, connected to the visualization console by a network, wherein  
4 the visualization console and the plurality of workstations operate together, wherein;  
5 the visualization console sends a plurality of requests to the plurality of  
6 workstations over the network, wherein the requests identify three dimensional objects to be  
7 rendered;  
8 the workstations create LOD representations of the three dimensional objects  
9 received from the visualization console; and  
10 the workstations return the LOD representations of the three dimensional objects  
11 to the visualization console, thereby allowing the visualization console to render an image of the  
12 three dimensional object.

1 13. The computer system as recited in claim 12, wherein the visualization console distributes  
2 three dimensional objects to the plurality of workstations over the network, and the workstations  
3 associate identifiers with the three dimensional objects.

1 14. The computer system as recited in claim 13, wherein each of the workstations inserts the  
2 three dimensional objects into at least one database accessible by each of the workstations and  
3 the visualization console displays the LOD representation of the three dimensional objects in a  
4 three dimensional scene.

1 15. The computer system as recited in claim 12, wherein the requests include a specified  
2 level of detail for the three dimensional objects.

1 16. The computer system as recited in claim 15, wherein the workstations create LOD  
2 representations of the three dimensional objects with the specified level of detail as contained in  
3 the requests.

1 17. A computer system for rendering a three dimensional scene, comprising:  
2 a visualization console;  
3 a plurality of workstations, connected to the visualization console by a network;  
4 means for sending a plurality of requests to the plurality of workstations over the  
5 network, wherein the requests identify three dimensional objects to be rendered;  
6 means for creating a LOD representation of the three dimensional objects received from  
7 the visualization console; and  
8 means for returning the LOD representations of the three dimensional objects to the  
9 visualization console, thereby allowing the visualization console to display an image of the three  
10 dimensional object.

1 18. The computer system as recited in claim 17, further comprising:  
2 means for distributing three dimensional objects to the plurality of workstations over the  
3 network; and  
4 means for associating associate identifiers with the three dimensional objects.

1 19. The computer system as recited in claim 18, further comprising:  
2 means for inserting the three dimensional objects into databases accessible by each of the  
3 workstations; and  
4 means for displaying the LOD representation of the three dimensional objects in a three  
5 dimensional scene.

1 20. The computer system as recited in claim 17, wherein the requests include a specified  
2 level of detail for the three dimensional objects.

1 21. The computer system as recited in claim 20, further comprising:  
2 means for creating LOD representations of the three dimensional objects with the  
3 specified level of detail as contained in the requests on the workstations.

1 22. The method as recited in claim 17, further comprising:  
2 means for receiving an input from a user on the first computer;  
3 means for processing the input to determine a first three dimensional scene that  
4 corresponds with the input; and  
5 means for receiving subsequent inputs from the user and processing the inputs to  
6 determine subsequent three dimensional scenes that correspond with the subsequent inputs,  
7 wherein the user interactively controls the display of the subsequent three dimensional scenes by  
8 his subsequent inputs.

## ABSTRACT OF THE INVENTION

A visualization console acquires a 3D data set representing a 3D scene. The visualization console then transfers at least some of the 3D objects within the 3D scene to a pool of workstations. The collection of workstations associates an identifier with each of the 3D objects, and manages the storage of these 3D objects. Sometime later, the visualization console sends a request to the pool of workstations for the data needed to render a 3D object contained in the workstation. The workstations perform multiresolution modeling computation and create a different set of models with the appropriate level of detail for the 3D object identified by the request. The workstations then send the mesh representation of the 3D objects requested to the visualization console for display. The visualization console will thus be able to render these models more efficiently than prior systems that either render the complete 3D scene or perform multiresolution computation by themselves.



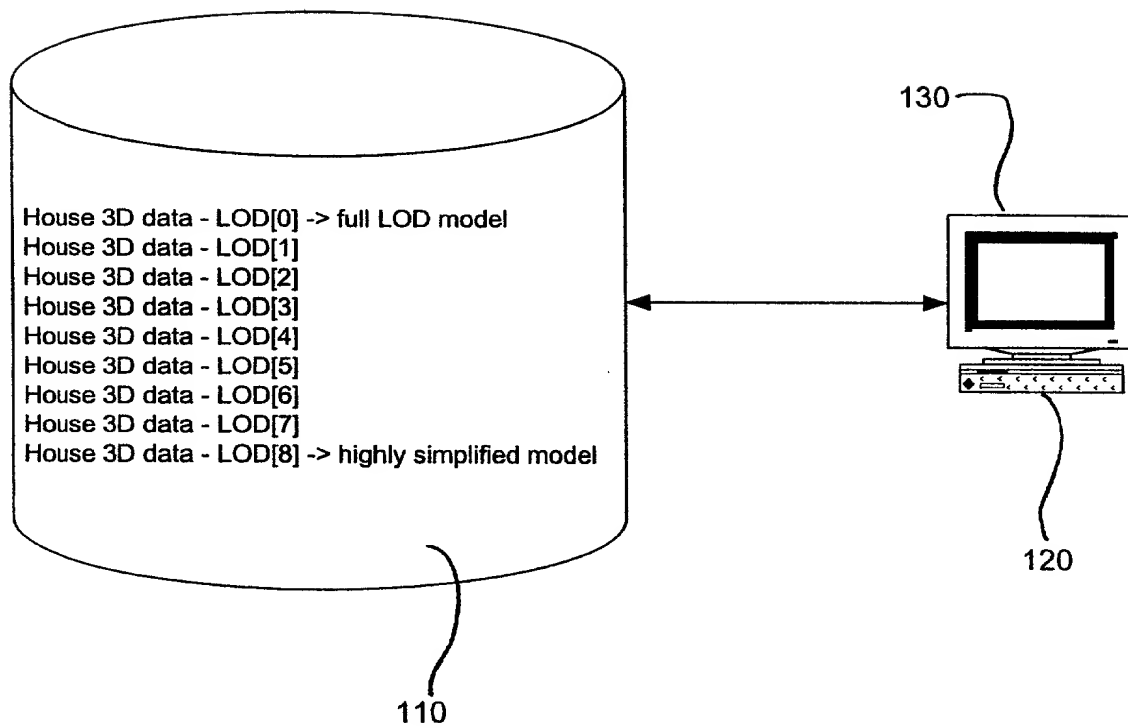


Fig. 1

662207 62982460

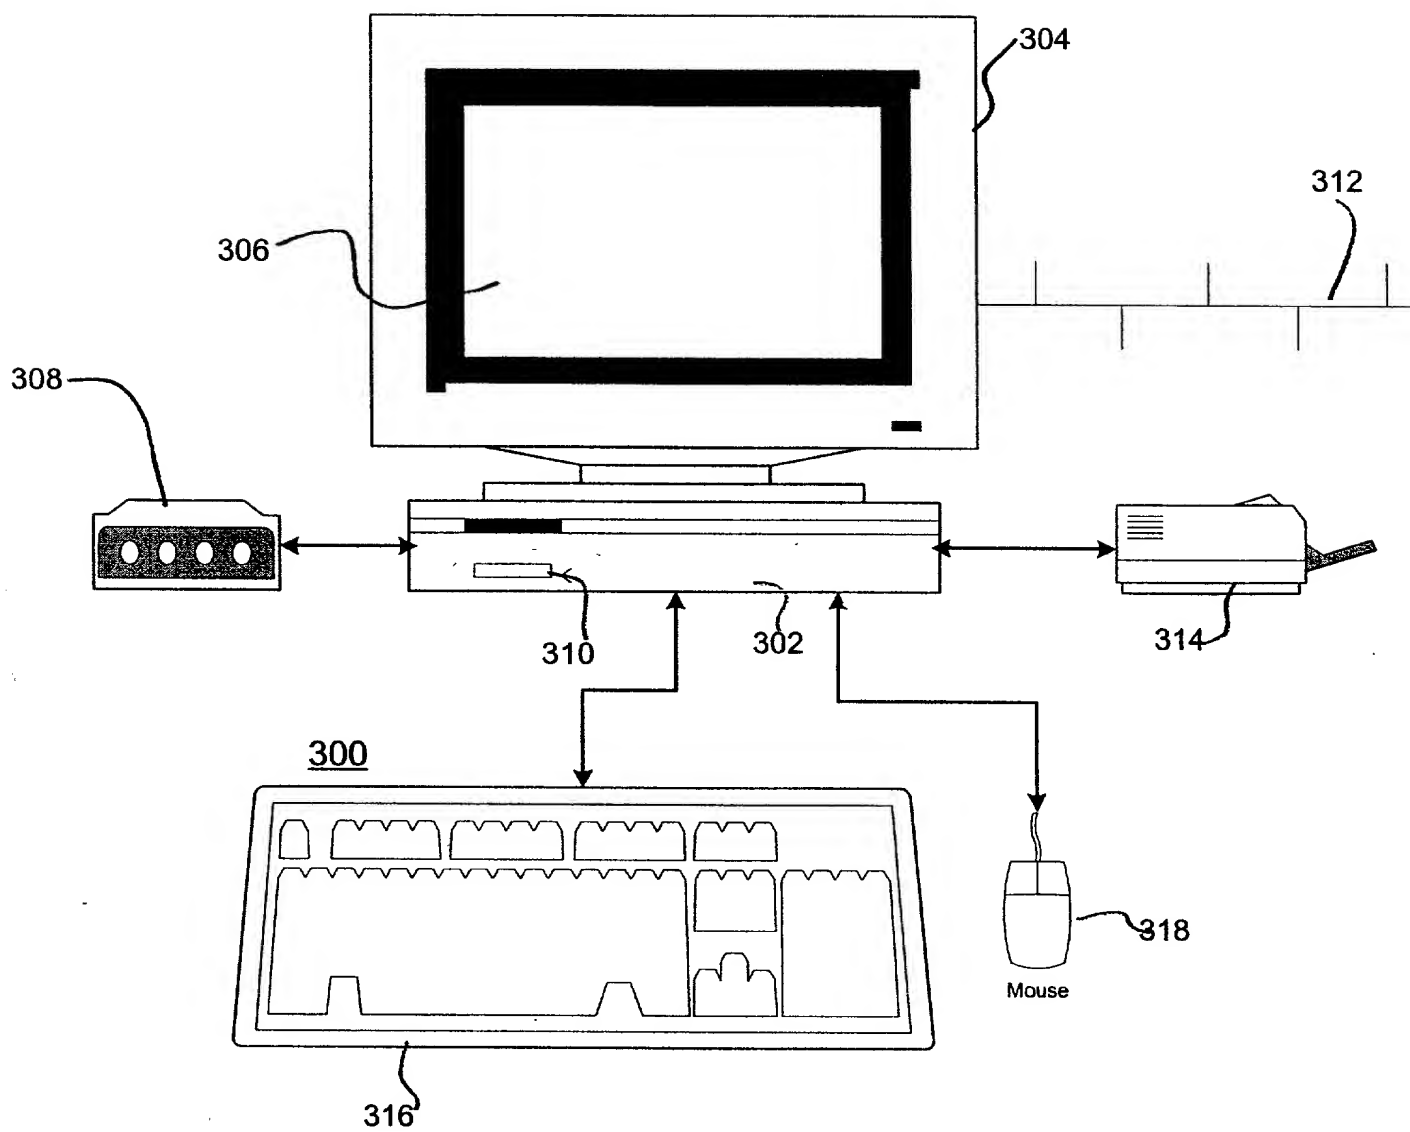


Fig. 3

654207 6298460

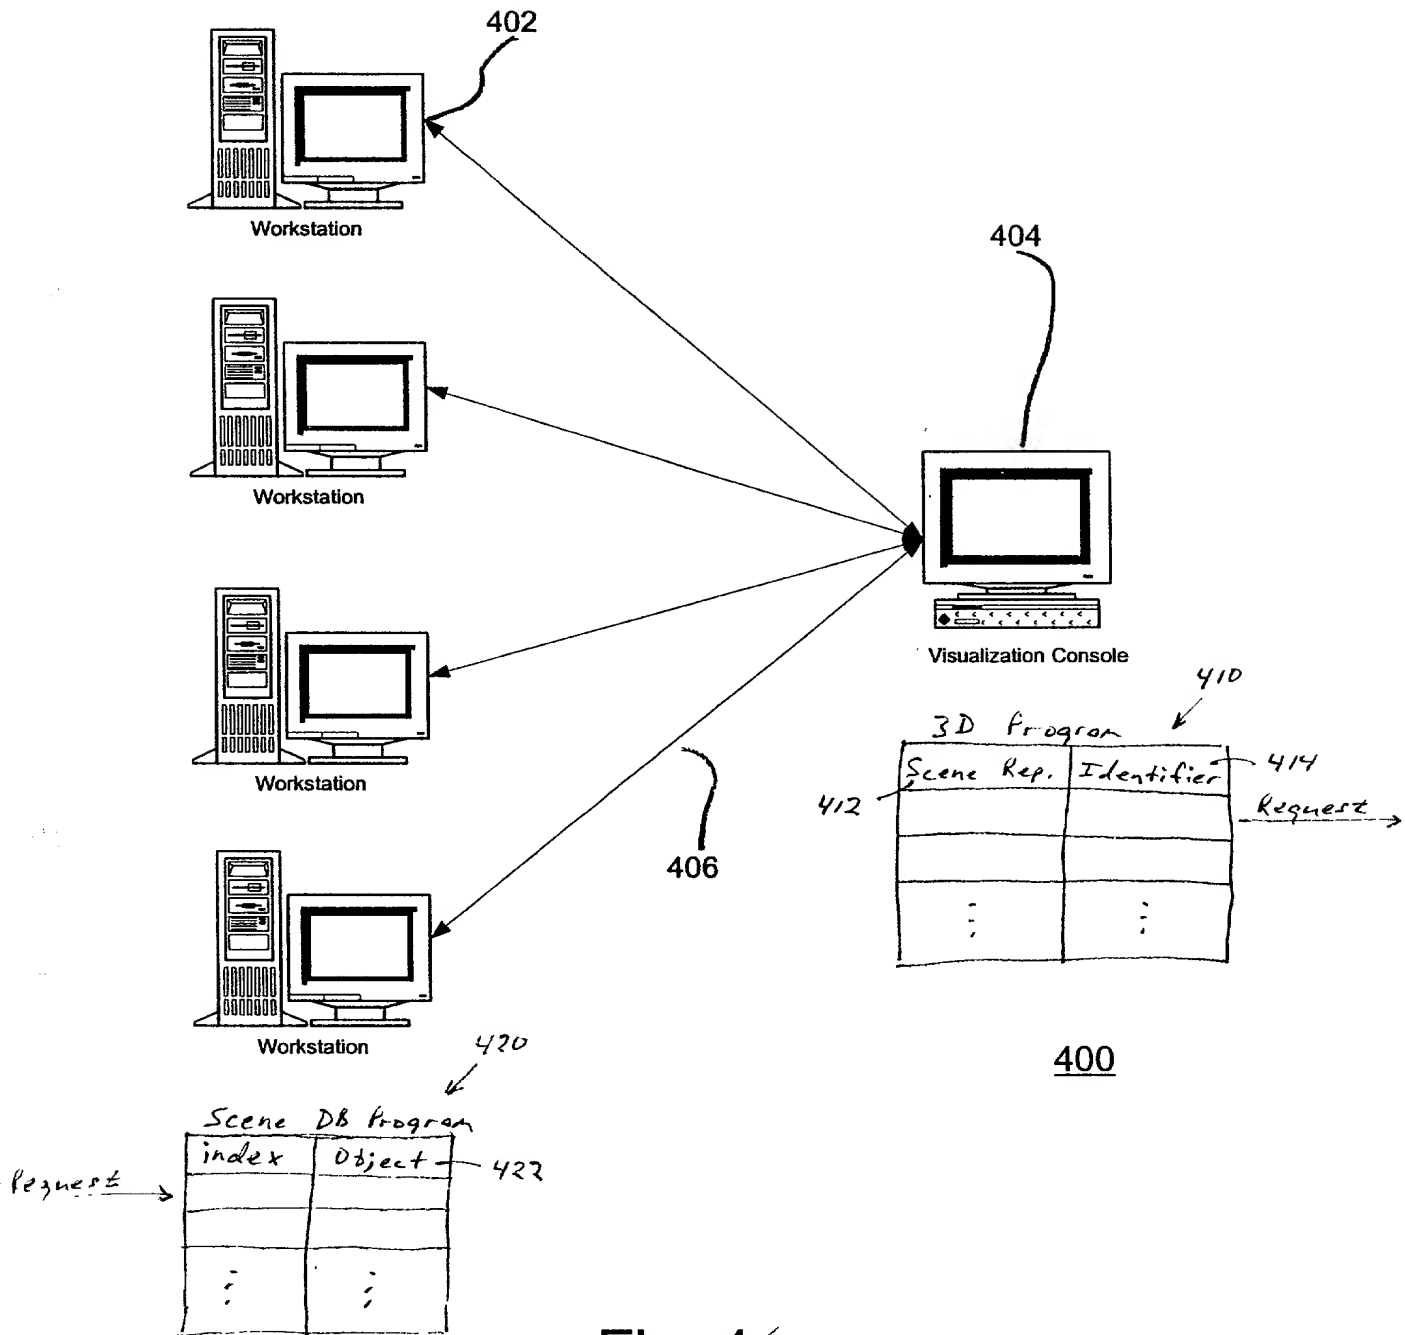


Fig. 4

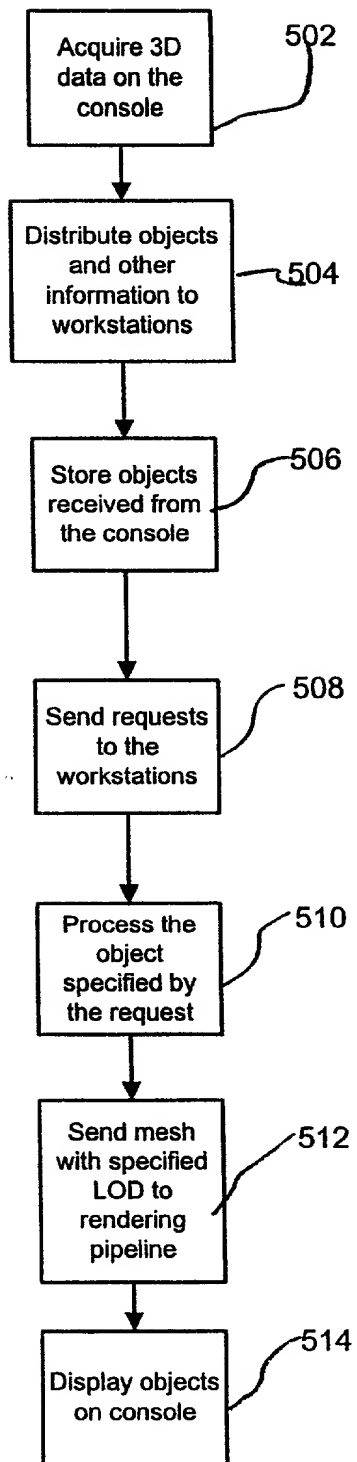


Fig. 5<sub>4</sub>

**DECLARATION**

SOLE/JOINT INVENTOR

As a below named inventor, I hereby declare that: my residence, post office address, and citizenship are as stated below next to my name. I believe I am the original, first, and sole inventor (if only one name is listed below) or a joint inventor (if plural inventors are listed below) of the subject matter which is claimed, as amended by any amendments referred to below, and for which a patent is sought on the invention entitled:

**Method and Apparatus for Displaying Distributed Multiresolution Scenes**

as described in the specification ☒ attached or ☐ of patent Application Serial No.

filed \_\_\_\_\_ and amended on \_\_\_\_\_

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above; that I do not know and do not believe the same was ever known or used in the United States of America before my or our invention thereof or patented or described in any printed publication in any country before my or our invention thereof or more than one year prior to this application; that the invention has not been patented or made the subject of an inventors certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representative or assigns more than twelve months prior to this application; and that I acknowledge the duty to disclose information of which I am aware which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations §1.56(a). Such information is material when it is not cumulative to information already of record or being made of record in the application, and

- (1) it establishes, by itself or in combination with other information, a prima facie case of unpatentability of a claim; or
- (2) it refutes, or is inconsistent with, a position the applicant has taken or may take in:
  - (I) opposing an argument of unpatentability relied on by the Office, or
  - (II) asserting an argument of patentability.

I hereby claim foreign priority benefits under Title 35, United States Code § 119 of any foreign application(s) for patent or inventor's certificates listed below and have also identified below any foreign application(s) having a filing date before that of the application(s) on which priority is claimed:

COUNTRY	APPLICATION NUMBER	DATE OF FILING	PRIORITY CLAIMED UNDER 35 USC 119
			<input type="checkbox"/> YES <input type="checkbox"/> NO

I hereby claim the benefit under Title 35 United States Code § 120 of any United States application(s) listed below and, insofar as any subject matter of any claim of this application is not disclosed in the prior United States Application, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations § 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF SOLE OR FIRST INVENTOR <b>ADAM L. SELIGMAN</b>		INVENTOR'S SIGNATURE <i>Adam L. Seligman</i>	DATE <i>10/20/99</i> <i>10/05/99</i>
RESIDENCE <b>HOUSTON, TEXAS</b>		CITIZENSHIP <b>U.S.A.</b>	
POST OFFICE ADDRESS <b>1633 HARVARD ST, HOUSTON, TEXAS 77008</b>			

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Seligman, A.

Attorney Docket: P1866

Filed: herewith

Examiner: not assigned

Serial No.: TBD

Art Unit: not assigned

For: Method and Apparatus for Displaying Distributed Multiresolution Scenes

POWER OF ATTORNEY BY ASSIGNEE

Under the provisions of 37 C.F.R. § 3.71, the undersigned assignee of record of the entire interest in the above-identified patent/patent application by virtue of an assignment recorded (check as applicable):

☒ Concurrently Herewith☐ Date Recorded \_\_\_\_\_☐ Reel Frame

OK/MC

elects to conduct the prosecution of the application/maintenance of the patent to the exclusion of the inventor(s). The undersigned hereby declares that she has reviewed the above-referenced assignment and hereby declares that, to the best of her knowledge, title is in the Assignee, and further declares that all statements made herein of his own knowledge are true and that all statements made on information and belief are believed to be true. The assignee hereby revokes any previous powers of attorney and appoints the following to prosecute this application/maintain this patent and transact all business in the Patent and Trademark Office connected therewith:

**(Prosecuting Attorney List)**

Melvin Sharp	20,556	Sarah T. Harris	35,891
James T. Comfort	19,086	T. Grant Ritz	39,819
N. Rhys Merrett	27,250	Barry Blount	35,069
Irene Kosturakis	33,724	Joseph Arrambide	39,589
Keith Lutsch	31,851	Richard P. Lange	27,196
Lou Brucculeri	38,834	Theodore S. Park	26,971

Please direct all communications to: Sharp, Comfort & Merrett, P.C., 13455 Noel Road, Suite 1710, Dallas, TX 75240, (972) 490-3695 to the attention of: Ira S. Matsil.

**ASSIGNEE****COMPAQ COMPUTER CORPORATION**

Date: 27 OCT 99

By: Diane H. Strong

NAME: Diane H. Strong

TITLE: Administrator, Patents

Authorized to Sign This Document On Behalf Of

Compaq Computer Corporation

Pursuant to Board of Directors Resolution

Date: July 28, 1989